


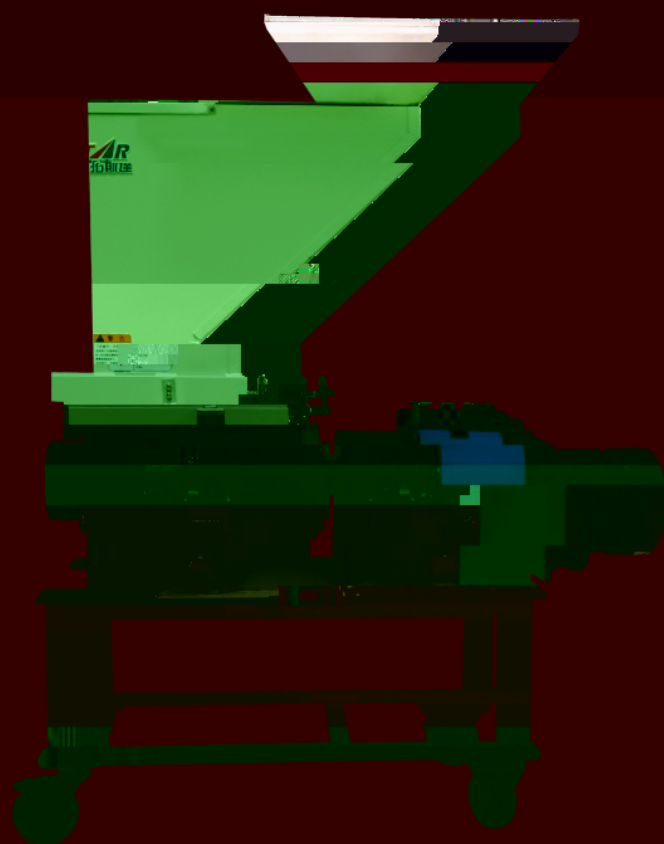

TGL

TGL Series Low Speed Sound-Proof Granulators


TGL

● **Specification Sheet**

MODEL	TGL-2526SB-L	TGL-2526SS-L	TGL-3232SB-L	TGL-3232SS-L	TGL-3243SB-L	TGL-3243SS-L
粉碎口径 Crushing Chamber (mm)	253×225		305×305		310×415	
粉碎能力(以PP料为标准)Crushing Ability (Kg/h)	10~15		20~30		30~40	
主轴转速 Revolutions (r/min)	20~24		20~24		20~24	
刀具结构形式 Cutter Type	滚刀Rotary+S刀S Knife		滚刀Rotary+S刀S Knife		滚刀Rotary+S刀S Knife	
旋转刀数量 Rotating Blades	S刀2件Two S+滚刀3件Three Rotary		S刀2件Two S+滚刀3件Three Rotary		S刀2件Two S+滚刀3件Three Rotary	
固定刀数量 Fixed Blades	6		6		8	
马达功率 Motor Power (HP)	1.5		2		3	
机器总功率 Total Power (KW)	1.1		1.5		2.2	
电源线规格 Wires Specifications (mm2)	4×1.5					
电源线长度 Wires Length (m)	5					
噪音 Noise Level (dB)	85					
碎料回收方式 Crushing Recycle Type	料箱式 Box	吸料式 Suction	料箱式 Box	吸料式 Suction	料箱式 Box	吸料式 Suction
外形尺寸 Imensions LxHxW(m)	0.91×1.29×0.43	0.91×1.29×0.43	1.05×1.33×0.48	1.05×1.33×0.48	1.16×1.35×0.48	1.16×1.35×0.48
重量 Weight(Kg)	205		280		323	

注：产品规格若有变更，恕不另行通知 We reserve right to change specifications without prior notice

● **吹料式回收系统流程图 Blown Material Type Recovery System Flowchart**

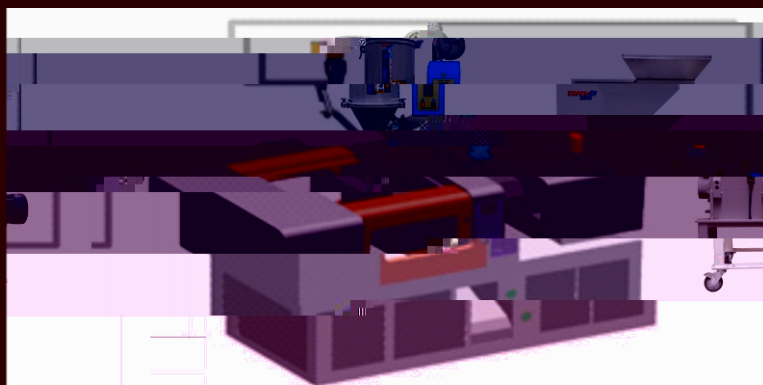

● **新次料比例回收系统流程图 The Data of The Proportion of The New Recovery System Flow Chart**



GUANGDONG TOPSTAR TECHNOLOGY CO.,LTD.

地址：广东省东莞市大岭山镇大塘朗创新路2号

ADD : No.2 Chuangxin Road, Datanglang, Dalingshan Town, Dongguan City,
Guangdong Province.

电话/TEL: 0769-8305 0999 传真/FAX: 0769-8584 5562

